

5M/FCOB constant voltage Led strips/

480pcs led/meter/DC24V/IP20/8mm

- Dot Free, Pixel Free, Spot Free
- 180deg Beam Angle
- Chip on Board
- New Cutting Edge Technology
- Higher Efficiency, Higher Brightness
- Lighting Trend Which Replace 2110 2216, 3014, 1919, 4040
- No Flicker, No Glare, Eye Protection
- Longer life span with 2 years warranty
- IP grade: IP20



Application:

Widely used in hotels, shopping malls, furniture, cabinets, shelf, as decoration lighting, direct lighting or indirect lighting

Installation:

3M Adhesive

Warranty:

2 years



Product Model	Color	CCT (K)	Ra	Beam angle (°)	Lumen (lm/m)	Efficiency (lm/W)	Voltage (VDC)	Current (mA/m)	Power (W/m)
FSIL.COB9.2720.4824	WW	2700	≥90	180	810	90	24	375	9
FSIL.COB9.3020.4824	WW	3000	≥90	180	837	93	24	375	9
FSIL.COB9.4020.4824	NW	4000	≥90	180	900	100	24	375	9
FSIL.COB9.5020.4824	NW	5000	≥90	180	927	103	24	375	9
FSIL.COB9.6020.4824	CW	6000	≥90	180	954	106	24	375	9

Product Model	Color	WL (NM)	Ra	Beam angle (°)	Lumen (lm/m)	Efficiency (lm/W)	Voltage (V DC)	Current (mA/m)	Power (W/m)
FSIL.COB9.R	R	620-625	/	180	108	12	24	375	9
FSIL.COB9.G	G	525-530	/	180	765	85	24	375	9
FSIL.COB9.B	B	470-475	/	180	126	14	24	375	9

5M/FCOB constant voltage Led strips/

480pcs led/meter/DC24V/IP20/8mm


Other features:

Product Model	IP grade	Working environment (°C)	Storage environment (°C)	Length (m)	Max connection Length (m)	LED Qty (pcs/m)	N.W (g/Roll)
FSIL.COB9	IP20	-25~+45	-30~+80	5	5	480	152

Notes:

- Testing environment temperature: $25\pm 2^{\circ}\text{C}$;
- Above data confirmed on the basis of 1M sample, 3000k, IP20.
- Different IP grade with different Data.
- Mark"—"means no testing requirement.

Dimensions:

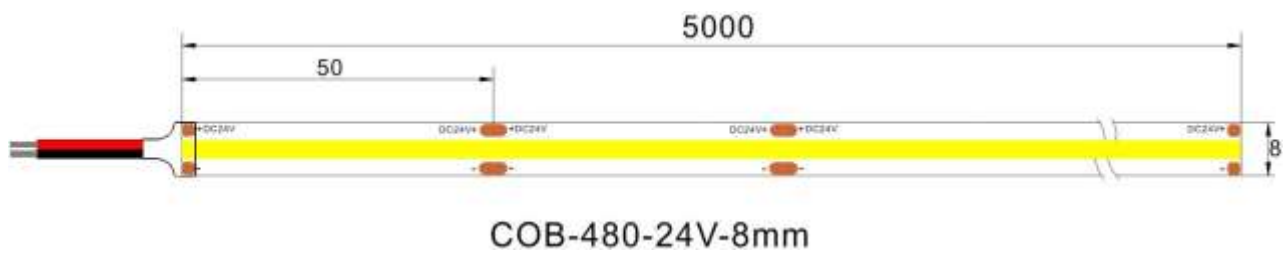

IP20


5M/FCOB constant voltage Led strips/

480pcs led/meter/DC24V/IP20/8mm

Package details :

Model	carton	Qty/Roll(m)	Qty/Carton(m)	Total Qty(m)	G.W(Kg)	size(mm)
FSIL.COB9	outer box	5	500	500	15.5	L720*W280*H410

Package :

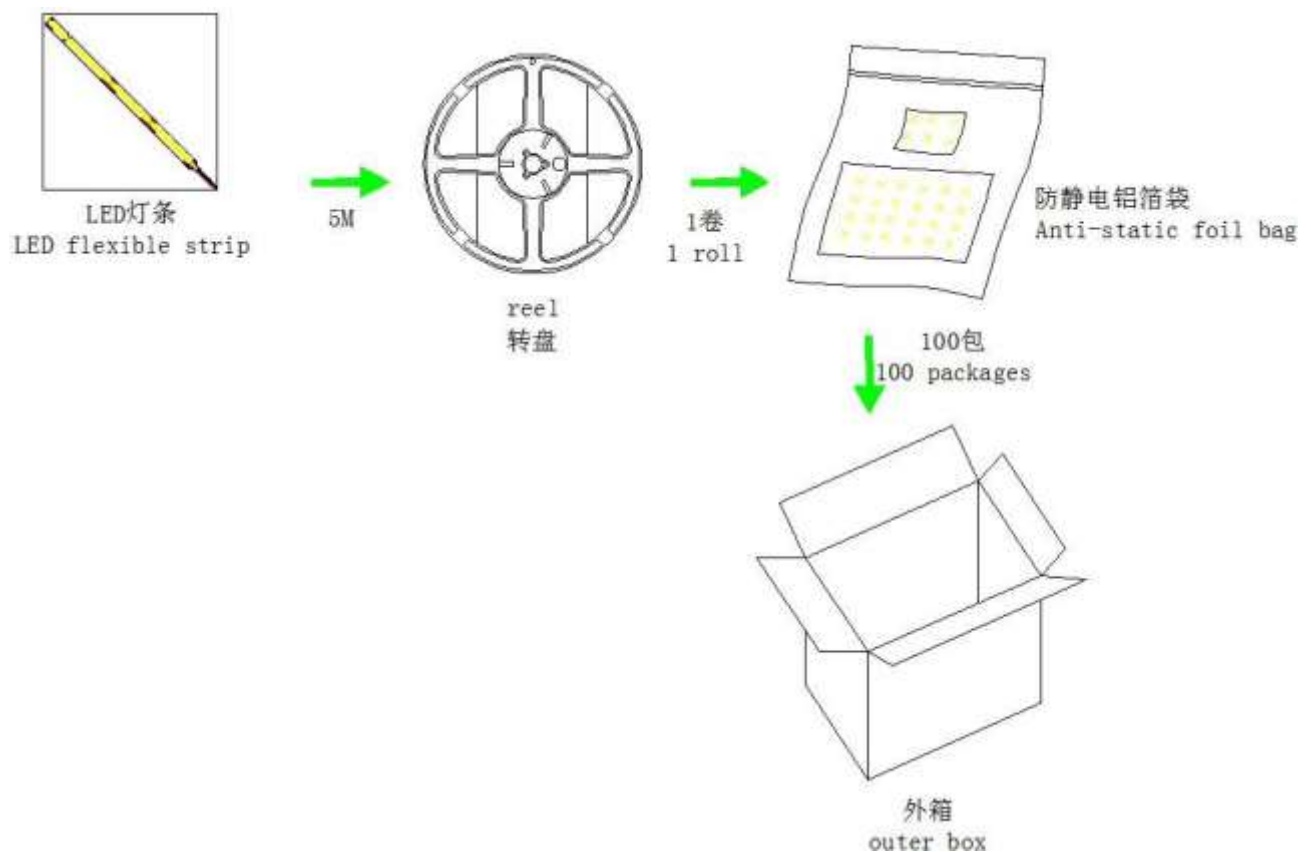

5M/FCOB constant voltage Led strips/

480pcs led/meter/DC24V/IP20/8mm

Schematic :




(PS: Strip positive connect to the driver positive,
Strip negative connect to driver negative)

Product and needed tools :



Product
Led strip




Needed tools
scissor


5M/FCOB constant voltage Led strips/

480pcs led/meter/DC24V/IP20/8mm


Installation steps :




- Clean the installation surface




- Measure the length you need to install, cut at the nearest scissor mark line.
- For the left led strip, weld at the next scissor mark to connect with other connection wire.




- Do not pull the whole led strip from the back release paper by one time. No press on the leds.




- Connect the led strip wire to the driver output side (Positive to positive, negative to negative.)
- Connect the driver input side to power-supply.




- Switch on and enjoy.

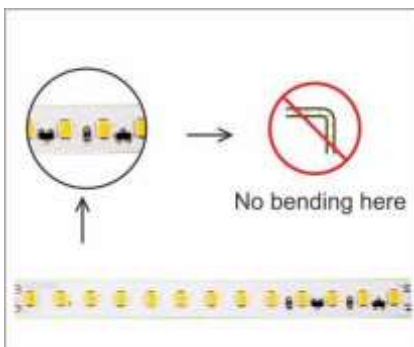

- No bending at the point of leds

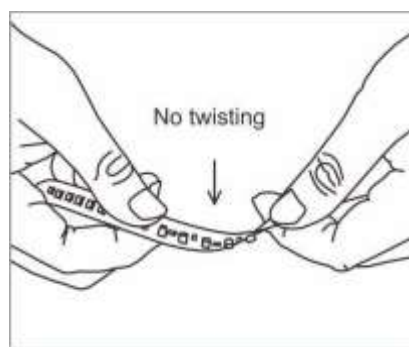

- No contortion of the led strip.

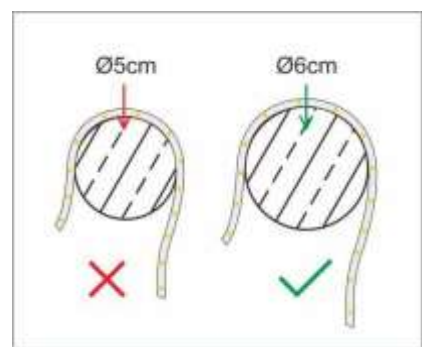

- No bending with Diameter < 6cm

5M/FCOB constant voltage Led strips/

480pcs led/meter/DC24V/IP20/8mm

Usual problem with solutions :

Problem	Possible reasons	solution
All fail	<ul style="list-style-type: none">No power supply	Give power supply.
	<ul style="list-style-type: none">Automatic switch-off because of the open circuit and short circuit	Solve the problem, switch on again.
Part fail	<ul style="list-style-type: none">Wrong connection (positive connect with negative)	Check and get right connection.
	<ul style="list-style-type: none">Part power-supply fail	Check and make sure the power supply well.
	<ul style="list-style-type: none">Part circuit error	
Inconsistent brightness or insuffiscent brightness	<ul style="list-style-type: none">Part wrong connection(positive connect negative)	Check and get right connection.
	<ul style="list-style-type: none">overload of the driver	Use higher-power driver.
	<ul style="list-style-type: none">Too big power consumption of the switch, or unbalanced power consumption from different strip series.	Keep the strip working voltage is more or less 5% than the Rated voltage. 1.shorten the connection cable length, or change to thicker cable. 2.Make sure the strip quantity is less than the allowed connection quantity.Keep the led strip quantity of each series similar).
LED flash	<ul style="list-style-type: none">Too many Led strips connection	Adjust the led strip quantity, make sure sufficient power supply.
	<ul style="list-style-type: none">Poor welding connection of wiresswitch problem	Check,find and solve it. Change to right switch.

5M/FCOB constant voltage Led strips/

480pcs led/meter/DC24V/IP20/8mm

Statements :

- For safety, the product wire should be moved and replaced by the manufacturer, agent or other authorized person.
- Please refer to the product manual before installation.
- Above-refered data is from our standard product. Please subject to your actual product data if there is difference.
- Above-refered schematic diagrams are from our standard product. Please subject to your actual product data if there is difference.
- In actual use,we suggest 80% consumption of the driver. Keep 20% as power to start the led strip.
- For safety, no touch the AC terminal.
- Any acidic or alkaline substance is forbidden.
- No notice for updated of this product.