
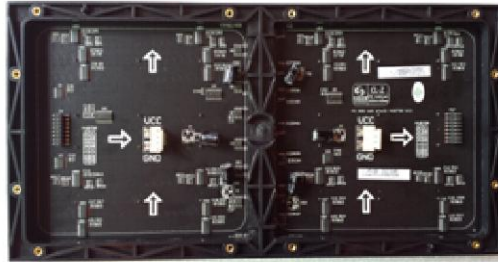


P5 - SMD

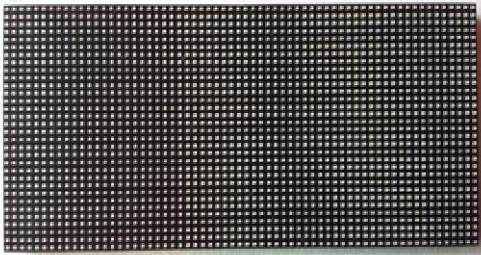

Package (SMD3528)	Color	Brand	Type	Luminance	wave length	Quantity
	Red	Epistar	12mil	200 - 240mcd	620 - 625 nm	1
	Green	Epistar	12mil	450 - 550mcd	525 - 530 nm	
	Blue	Epistar	12mil	110 -140mcd	465 - 470 nm	

Specifications

Pixel Pitch	Pixel Density	Module Size(MM)	Weight(kg)
5mm	40000	320 x 160	> 0.38
Scan Mode	IC Size	Brightness	Pcb thickness:
1/16 Scan	6616(Normal)	>1800nits	1.5mm
Ex factory pass rate	Best viewing distance	View Angle(V/H)	Working Humidity
99%	5 - 30m	120°/60°	≤90%
Max Current	Max. Power	Max. Power for 1sqm	Working Temperature
6.4A	32W	800W	-10℃—50℃
Driver IC	Material of case and mask	Define of interface	Warranty
Constant Current	Makrolon(PC)	HUB75B	2Years

Led Module Details

Driver IC	74HC245, 6616, 74HC138, 4953,
Data Cable	16P/25CM
Power Cable	Red&Black 5V/40CM (2.5M ²)

Led Module Hole Drawing picture

