



•FSSG.1014.xx20.7024




- 7 led/group design, up to 146 lm/w
- 2200-6000K Multi-color temperature optional

TECHNICAL DETAILS

Product No.	FSSG.1014.xx20.7024
Power	14.4W/M
Voltage	DC24V
CRI	80
Led Qty	70LEDs/M
Length/Reel	5M
Working Temperature	-20~50°C
Storage Temperature	-30~80°C


LIGHT DISTRIBUTION

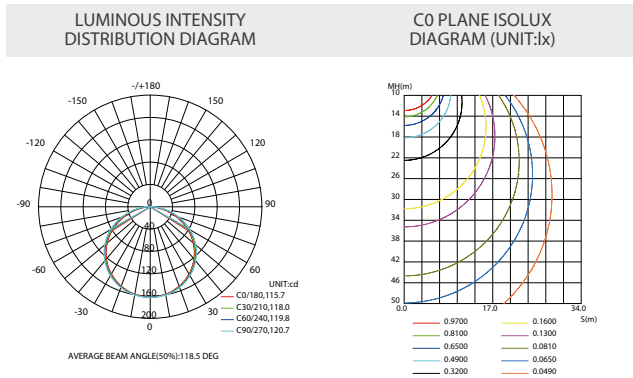

LUMENS PER METER


Color Temperature	Lumens per Meter
2700K	1920lm
3000K	1980lm
4000K	2050lm
6500K	2130lm

DIMENSION

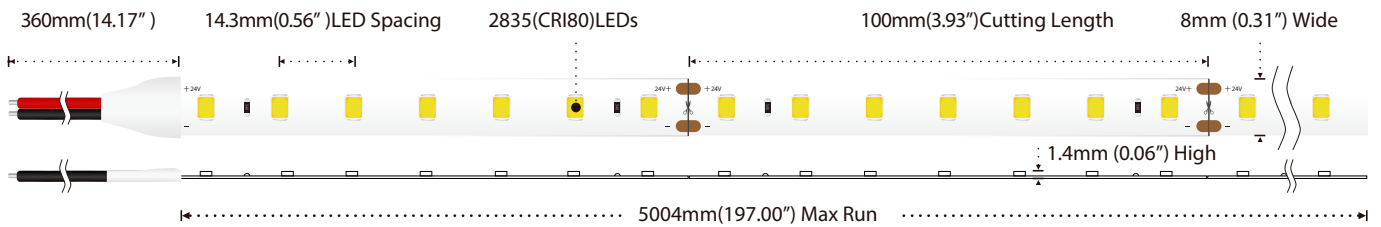




POWER CONNECTION DIAGRAM

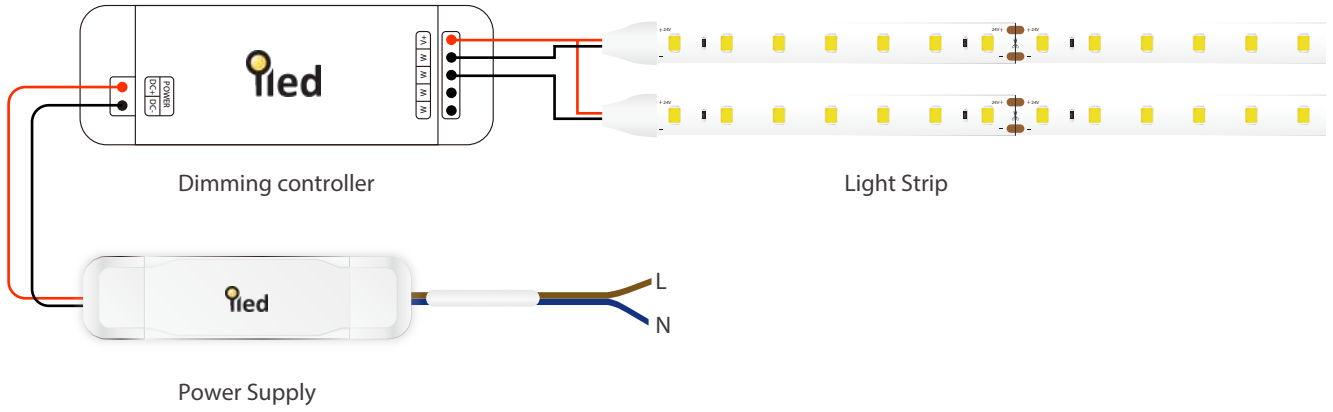

INSTALL

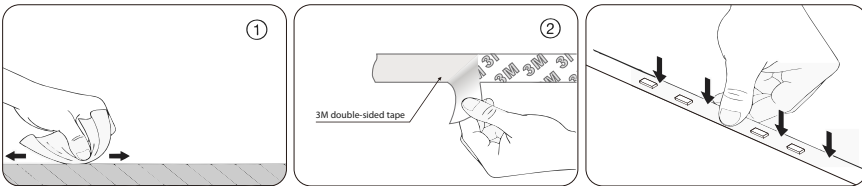

Clean the environment part to be attached with a cloth, as shown in Figure 1, and then tear off the 3M tape on the back of the light belt, and finally stick the light belt on the clean place.

*Please refer to the installation manual for details

PACKING

Box dimension(mm)	Carton dimension(mm)	Electrostatic size(mm)	Reel size(mm)	outer box(bags/carton)
500×260×380	360×240×240	240×220	7×8	50
Net weight (kg)	Each box net(kg)	Gross weight of each box(kg)	Bag quantity(bags/carton)	
0.1	5	6.3	25	

