


SMD5730 Rigid LED Bar



Features

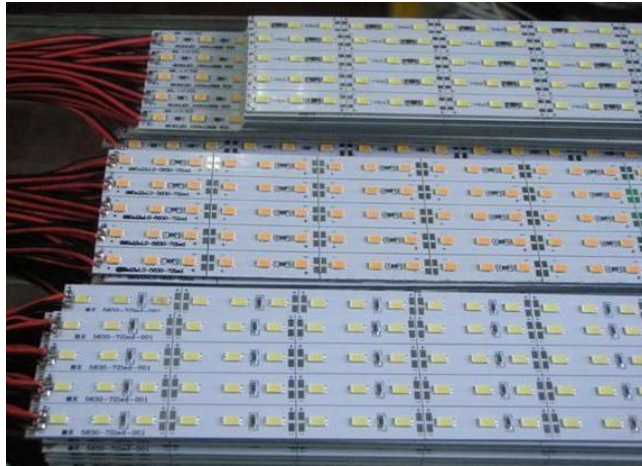

High Quality Led 0.5W SMD5730



1.2MM Thickness Aluminum PCB



Stable Soldering Welding

1. Finest 5730 LED Package Supplier in China to Guarantee High Efficacy
2. 1.2MM Thickness, 12MM Width Aluminum PCB
3. Low Temp Reflow Soldering Welding Guarantee the stable Quality
4. 3leds a Unit can be cut
5. Stable 3M Double Tape to make installation easier

Application:






1. Architectural Decorative Lighting
2. Border/Contour Lighting
3. Auditorium Walkway Lighting
4. Stairway Lighting
5. Illuminated Signage
6. Hotel, Kitchen Room
7. KVT, DJ Room, Show Room, Display
ETC


Specification

Part No.	RYBT1000-72W5730		
Lumen	2765 lms	2880 lms	3110 lms
Color	3000K	4000K	6500K
CRI	>72		
Watts	28.8W		
Voltage	12V DC		
Current	2.4 A		
LED No	72leds – SMD5730		
Size	1000 * 12*1.2 MM		
View angle	120 degree		
Life	30,000hrs		
Storage Temp	-25℃ - 70℃		
Operation Temp	-25℃ - 60℃		
IP	IP20		
Certificate	CE / RoHS		
Warranty	2 Years		

Light Diagram & Light Distribution

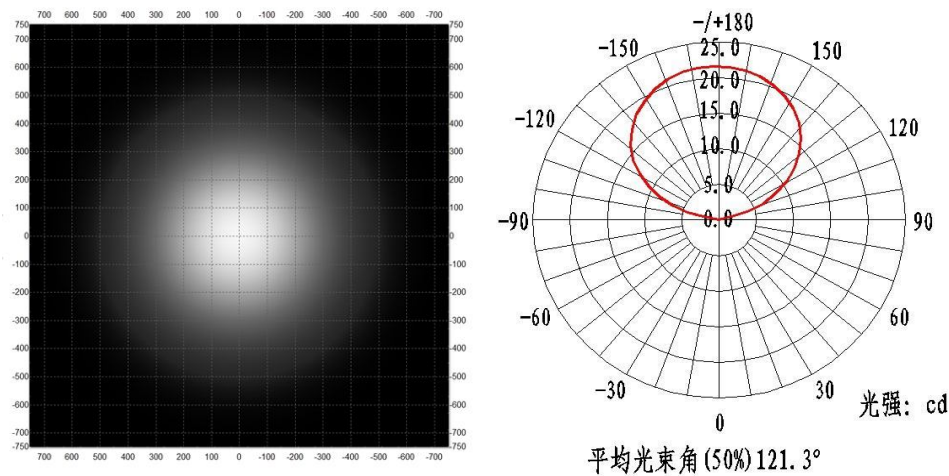

Dimension

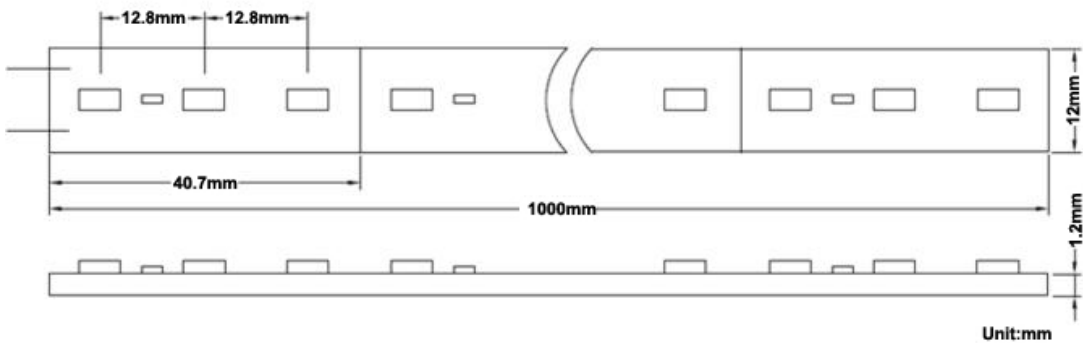

Connection

