





DIFFUSION LENS TYPE 3 MINI LENS SERIES

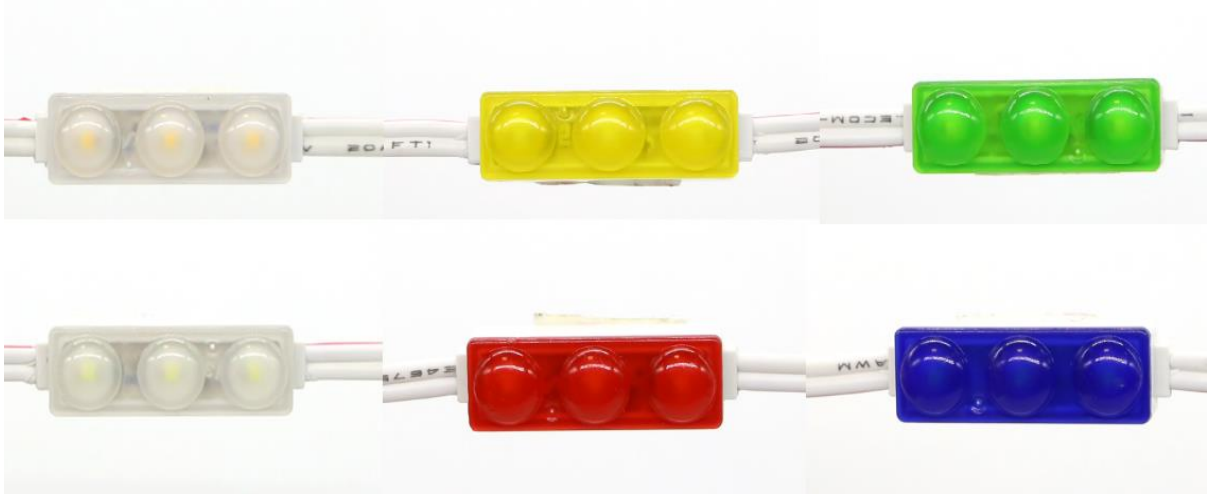

Side View

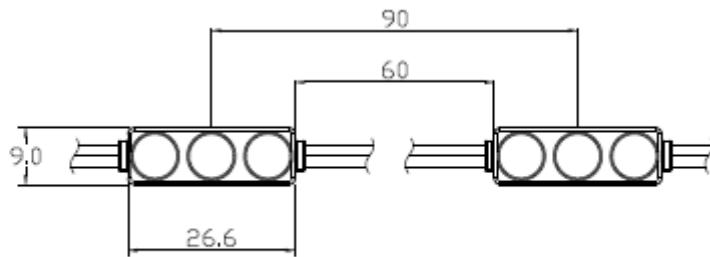


Top View



ANX LED MODULES

ANX 3MHDW3 MINI









1. GENERAL DESCRIPTION

ANX LED Modules designed by ANYLUX CO., LTD has design patent for all design concept. ANX LED Modules are consisting of ANX 2, 3, 4 Injection Lens Series.


ANX 3 Mini Diffusion Lens Series is very technically designed to have the brightest output when turning on. Engineer from ANYLUX CO., LTD considered about durability, brightness, stability, various application and etc.

ANX 3Mini is very compact with high intensity of illumination. ANX 3 Mini can evenly illuminate by small space of lighting box.











2. FEATURE

-  SMD LED Mounted, CE Approved.
-  Technical Size & Compact Design
-  Safe & Stable Operation with DC12V (Constant-voltage)
-  Water –Proof (IP68)
-  Wide Viewing Angle
-  Installation with Tape & Screw with 3mm Bolts

3. APPLICATION

-  Back Lighting for Signage & Channel Letter
-  Outdoor Lighting for Advertising
-  Decorative Lighting
-  Architectural Lighting; Shelf Lighting, Garden, Building and others

4. PHYSICAL CHARACTER


Dimension (W*D*H)	29.5 * 9 * 8.5(mm)	Weight	5 g	
LED Package	HONGLI SAMSUNG	Module Connection	Wire (60mm)	
Operating Temp	-30° ~ 70°	Storage Temp	-40 °~ 75°	
Case Material	ABS	Installation	3M Tape	
Lens Material	Diffusion ABS			
Wire Thickness	1.8mm	Wire Type	Copper, USA - UL	
Lens Color				
 White	 Red	 Green	 Yellow	 Blue
				



5. ELECTRICAL AND DIFFUSION CHARACTER

Model	ANX 3MHDW3	ANX 3MHDWW3
Color	White (Hi-Power/SAMSUNG)	Warm White (Hi-Power/SAMSUNG)
Power Dissipation	0.72 W	0.72 W
Current Dissipation	60mA	60mA
Viewing Angle (°)	155°	155°
Luminous Flux (lm)	72	72
Color Temp' (K/nm)	9,000~ 10,000K	2,700~ 3,000K
luminous Intensity (cd)	19	19
Operating Supply	DC 12V	

📖 LIGHT DISTRIBUTION DIAGRAM

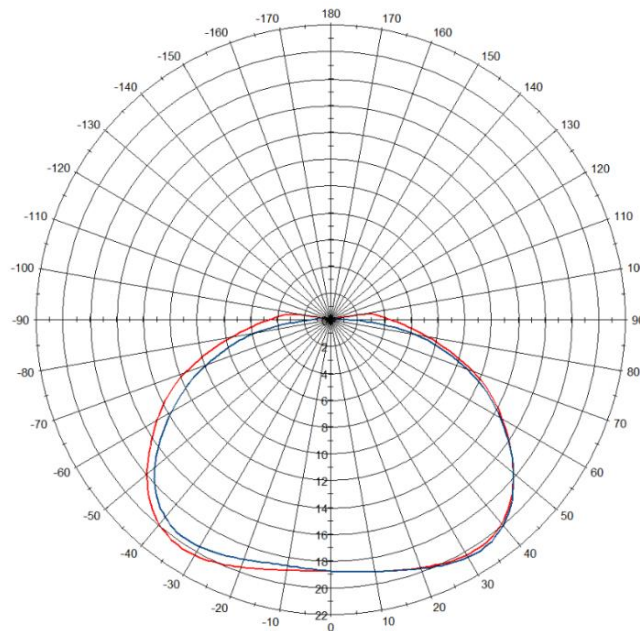




6. CONNECTION GUIDE WITH SMPS

ANX LED Modules has **POLARITY (+/-)**

: White , Worm White, Red, Green, Blue, Yellow

Eg) Connection of ANX 1&3W Series LED Modules

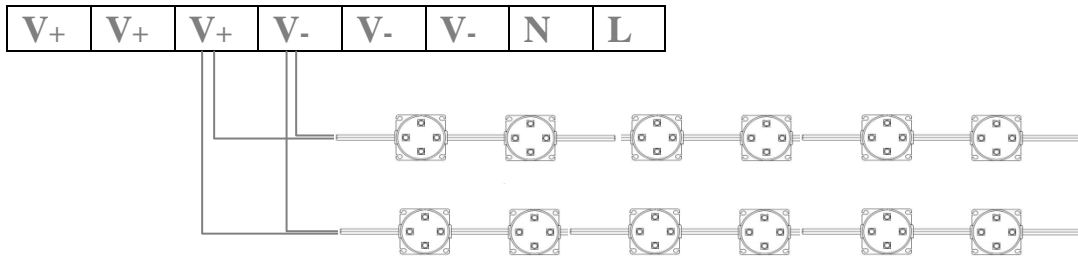




7. DIMENSION

📖 29.5 mm * 9mm * 8.5mm (L*W*H)

📖 Distance between each module : 60mm

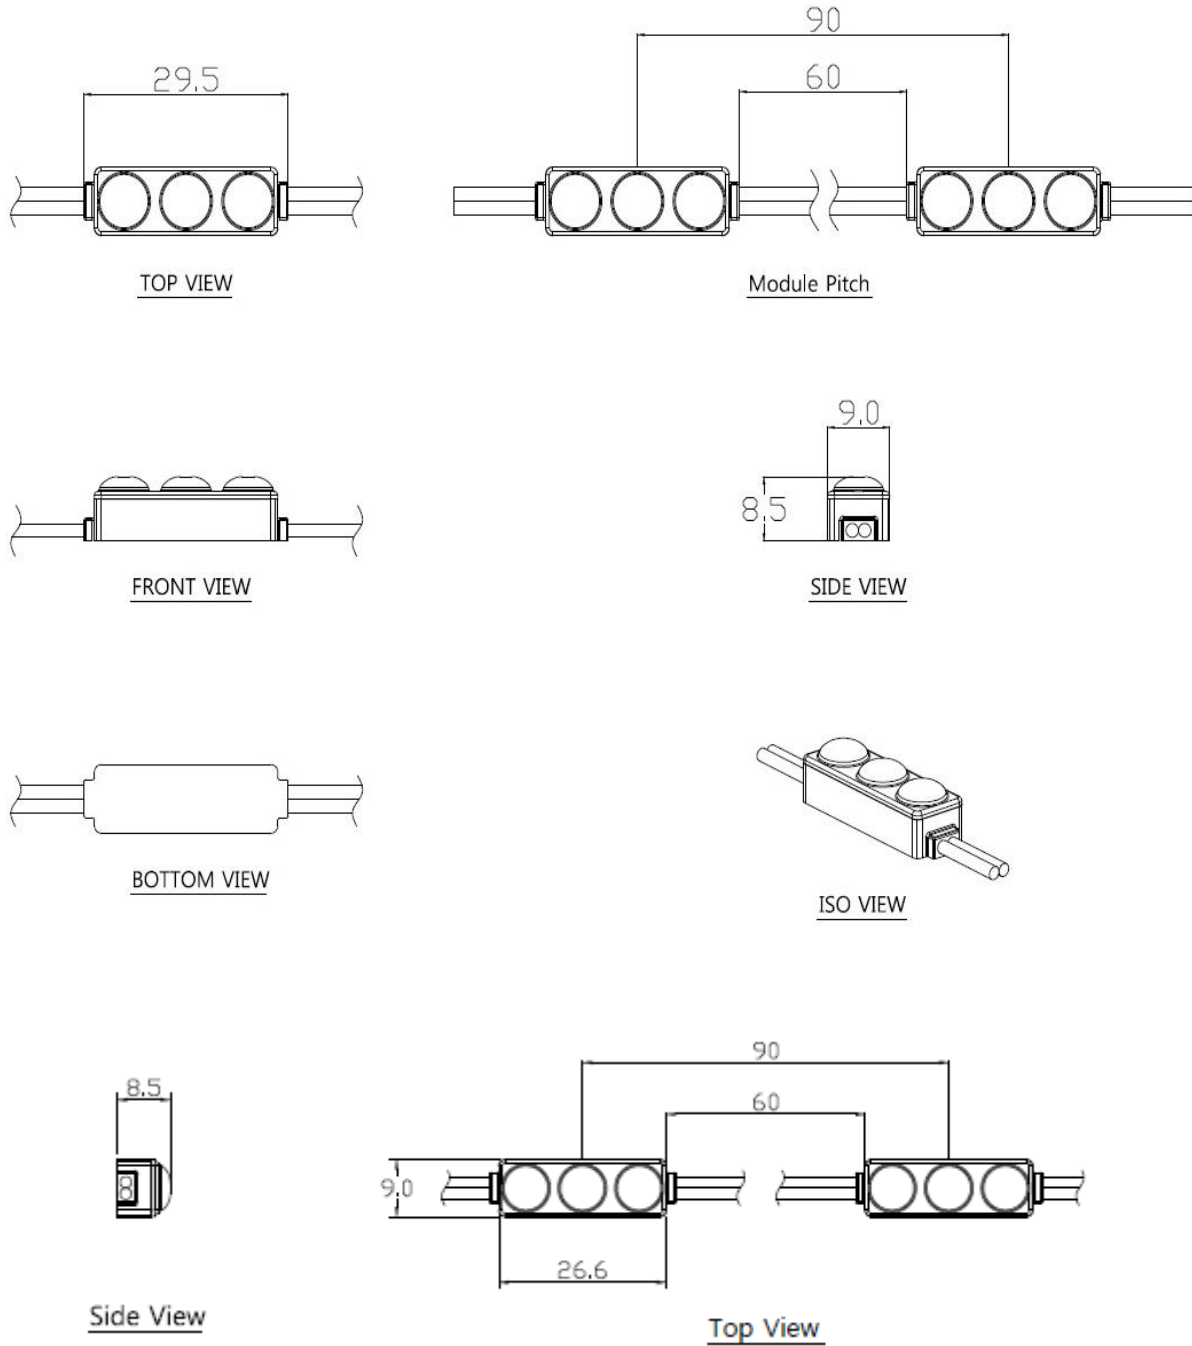



8. PACKING

📖 Carton Box Size = W*D*H= 28*41*31 (7.5 KG based on 2,000pcs)

📖 Carton Box Size = W*D*H= 38*50*34 (17.5 KG based on 5,000pcs)



📖 Inside box: 200pcs / (200pcs/ 1 Pack) * 10 or (200pcs/ 1pack) *25

📖 Carton Box: 2,000pcs (Weight: 7.5 KG) / 5,000pcs (weight : 17.5KG)

9. LABEL

📖 Label for Inside Box & Label for Carton Box

Eg)

ANX3MHDW3
200pcs

ANXSH 3W
75pcs



ITEM	LED MODULES
MODEL	ANX3MHDW3
COLOR	WHITE
QTY	2,000pcs
CTN NO.	1
MADE IN KOREA	

ITEM	LED MODULES
MODEL	ANXSH 3W
COLOR	WHITE-SAMSUNG
QTY	5,000pcs
CTN NO.	5
MADE IN KOREA	

10.APPROVAL

IP68

FC



CE

