


# 2835-N312 Module LEDs



## PRODUCT FEATURES:

Material and technology :	Using ultra bright 2835 bulb quality, Using Aluminium sheet, The plastic injection process, beautiful appearance, unique, good heat dissipation effect
Lighting character :	View angle, color uniform, Light emitting angle up to 160
Lumen depreciation :	Good dissipation, no more than 5% after 50000h
Electrical safety :	Use 12v power supply, safety and reliable
Installation :	3M tape back of strip, ultrathin design
Use :	Advertising signs, outer glow word, building outline lighting, interior decoration etc

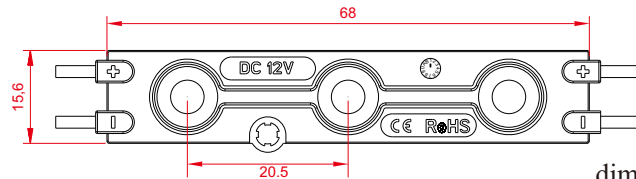


dimension diagram (unit:mm)

## PRODUCT PARAMETER:

Power:	1.4 W/pcs
Input voltage :	DC12V
Waterproof rate :	IP 67
Size :	68*15.6*7mm
LM:	125-135 lm/pcs
Led quantity/pcs :	3 led
Module quantity/String :	20 pcs/String
Color for choice :	W.R.G.B.Y
View angle:	160°
Weight:	0.8KG/100PCS

## POWER SUPPLY INSTALLATION INSTRUCTION:

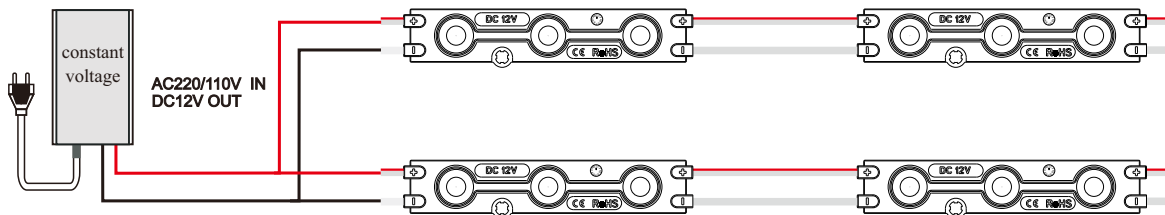

Power supply:	12v constant voltage
Power supply match:	suggest connect 1 power supply to each chain(20pcs module)
power supply connection :	attention the positive and negative ,don't polarity reversed
Strip cutting:	3 led/pcs ,any length cutting for the pcs

## PRODUCT MODEL:

Model	color	working voltage	working current	power	view angle	led quantity/String	size(mm)	package	waterproof for choice
		DC 12V	0.12 A/pcs	1.4W/pcs	160°	60 LED	68*15.6*7	200pcs/pack	IP 67



Trade Assurance

Injection Module

CW	15000K 125LM
WW	2800-3200K 129LM
R	620nm-35 lm
G	527nm-90 lm
B	470nm-20 lm
Y	590nm-30 lm